


### Pan Torx Head Standard

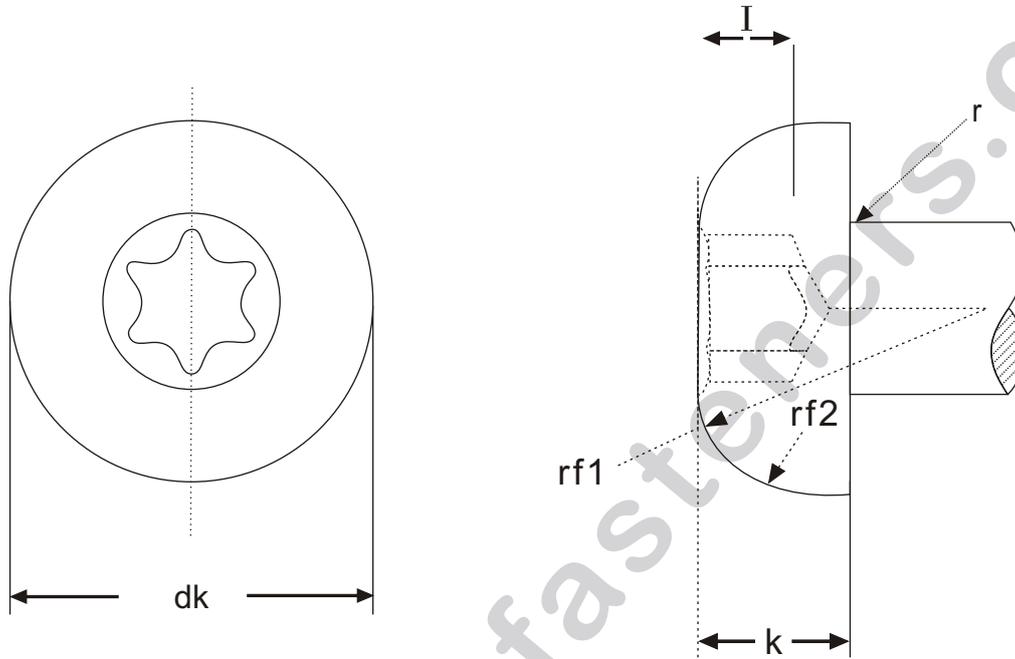

Other standards are available at [vaishnavfasteners.com](http://vaishnavfasteners.com)

Unit : [mm]

SCREW SIZE		DRIVE SIZE	dk		k		rf1	rf2	I		r		CODE NUMBER			
MACHINE SCREW	TAPPING SCREW		HEAD DIAMETER		HEAD HEIGHT		HEAD RADIUS1	HEAD RADIUS2	RECESS GAGING DEPTH		MACHINE SCREW	TAPPING SCREW	②	③	④ PUNCH DIAMETER	
			BASIC	TOL	BASIC	TOL	APPROX	APPROX	MAX.	MIN.	MIN.	MAX.			(mm)	(inch)
M2	2	T6	3.5	0	1.30	t 0.10	4.5	0.6	0.65	0.50	0.10	0.30	JPMX	M 2	12	7/16
M2.5	2.5	T8	4.5	-0.4	1.70		6.0	0.8	0.85	0.70	0.10		JPMX	M 2 . 5	12	7/16
M3	3	T10	5.5	0	2.00	t 0.15	7.0	1.0	1.05	0.85	0.10	0.40	JPMX	M 3	12	7/16
-	3.5	T15	6.0		2.30		8.0	1.1	1.20	1.00	-		JPMX	M 3 . 5	14	9/16
M4	4	T20	7.0	2.60	9.0		1.3	1.40	1.20	0.20	0.50	JPMX	M 4	14	9/16	
-	4.5	T20	8.0	2.90	11.0		1.5	1.40	1.20	-		JPMX	M 4 . 5	18	7/8	
M5	5	T25	9.0	-0.6	3.30	12.0	1.6	1.6	1.40	0.20	0.60	JPMX	M 5	18	7/8	
M6	6	T30	10.5	0-0.7	3.90	t 0.20	14.0	1.9	1.9	1.65	0.25	0.70	JPMX	M 6	23	7/8
M8	8	T40	14.0	0-0.8	5.20		18.0	2.6	2.8	2.35	0.40	0.90	JPMX	M 8	23	7/8